



Printed Pages : 4

ME – 201

(Following Paper ID and Roll No. to be filled in your Answer Book)

PAPER ID : 4033

Roll No.

--	--	--	--	--	--	--	--	--	--

### B. Tech.

(SEM. II) EXAMINATION, 2006-07

### Mechanical Engg.

Time : 3 Hours]

[Total Marks : 100

- Note :**
- (1) Attempt **all** the questions.
  - (2) Assume missing data if any.
  - (3) Use of steam table and Nollier's chart is permissible.

- 1** Attempt any **four** parts of the following : **4×5=20**
- (a) Define : Thermodynamic state, process, quasistatic process.
  - (b) Explain : continuum, thermodynamic equilibrium
  - (c) Differentiate between characteristic gas constant and universal gas constant. Using ideal gas equation, find the characteristic gas constant for oxygen gas.
  - (d) Explain the principle of thermometry and explain a scheme of temperature measurement using a thermometric property,
  - (e) What are fixed points in thermometry? Derive the relation between the numerical values on absolute and centigrade scales.
  - (f) How a real gas behaviour deviates from that of an ideal gas behaviours. Explain the vander Waal's equation.

V-4033]

1

[Contd...

2 Attempt any **two** of the following : **10×2=20**

- (a) Show that the internal energy of a system is a state property. A closed system undergoes a reversible process at a constant pressure of 4 bar. Its volume changes from  $0.2\text{m}^3$  to  $0.1\text{m}^3$ . Determine the change in internal energy of the system if net heat added to the system during the process is 40 kJ.
- (b) Define (i) heat engine (ii) Refrigerator (iii) Heat Pump. A heat engine operates between a source at  $900^\circ\text{C}$  and the sink at  $30^\circ\text{C}$ . It develops a power of 10 kW. Determine the rate of Heat rejection to the sink.
- (c) What do you understand by steady state? Derive steady state energy equation. A compressor of a gas turbine receives air at 1 bar and  $27^\circ\text{C}$ . Inlet air enters at a speed of 15 m/s and leaves at speed of 100 m/s. The pressure and the temperature at outlet are 20 bar and  $500^\circ\text{C}$ . If the mass flow rate is 6.5 kg/s, find the input power required to operate the compressor. Take  $C_p = 1 \text{ kJ/kgK}$

3 Attempt any **two** of the following : **10×2=20**

- (a) 3 kg of saturated liquid water is contained in a constant pressure system at 5 bar. Energy is added to the system until it has a quality of 60% Determine.
  - (i) The saturation temperature
  - (ii) Final temperature and pressure
  - (iii) Change in volume and
  - (iv) Change in enthalpy of the system.

- (b) With the help of neat sketches, explain the working of a four stroke compression ignition. Engine show the processes on P-V diagram and obtain the work done by the engine in one cycle.
- (c) In an otto cycle, the air at the beginning of compression is at 1 bar and 40°C. The ratio of compression is 8. The heat added during the constant volume process is 1000 kJ. Determine :
  - i) The max. temp in the cycle.
  - ii) The air standard efficiency
  - iii) The work done /kg of Air and
  - iv) The heat rejected per kg.Take  $C_v = 0.718 \text{ kJ/kgK}$  and  $\gamma = 1.4$

4 Attempt any **two** parts of the following: **10×2=20**

- (a) In **fig. 1** the rods A and B are of same length. The cross sections of A and B are 4 cm<sup>2</sup> and 6 cm<sup>2</sup> respectively. Plate C is rigid and remains horizontal before and after a pull of 5000 N is applied. Find the displacement of the plate and the stresses in rods A and B. Given that the Youngs' modulus of material of rod A is 200 kN/mm<sup>2</sup> and that of B is 100 kN/mm<sup>2</sup>.

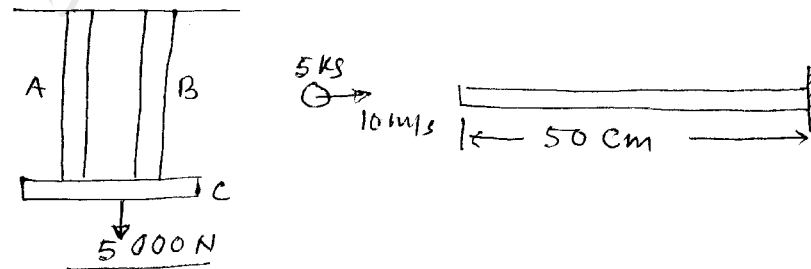
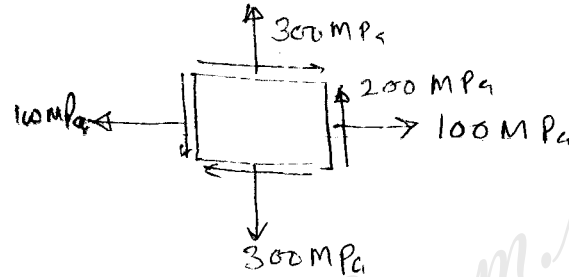


Fig. 1 & 2

- (b) Differentiate between brittle and ductile materials. Draw stress-strain diagram for a ductile materials and show and explain the different points coming on it.
- (c) (i) Explain the concept of complementary shear stress.  
(ii) Find the principle stresses and principal directions for the state of stress shown in **fig. 3.** below :



**Fig. 3**

- 5** Attempt any **two** of the following : **10×2**
- (a) A cantilever beam has a rectangular cross section 50 mm wide and 150 mm deep. The cantilever is 2 m long and carries a concentrated force of  $10^4$  N at the free end. Calculate the maximum bending stress in the beam.
  - (b) A solid shaft of diameter 10 cm, transmits 10 kW power at 1500 R.P.M. Find the maximum shear stress in the shaft. If the diameter is increased by 10%, how much power may be transmitted by the shaft without changing the maximum shear stress in the shaft ?
  - (c) Define the following terms :
    - (i) Shear strain
    - (ii) Principal stress
    - (iii) Section modulus
    - (iv) Pure bending
    - (v) Poisson's Ratio.